

HBLD2-C ELECTRICAL WHEELCHAIR



HBLD2-C ELECTRICAL WHEELCHAIR

PRODUCT OVERVIEW



HBLD2-C Electrical Wheelchair

Electrical Wheelchair boasts a mileage of 20km and weighs only 23kg. Powered by 1 Rear Wheel Motor Driver, Dual Automatic Electronic Braking System and Timing Belt Transmission, the HBLD2-C ensures sufficient power for movement up and down.

ELECTRICAL WHEELCHAIR

PRODUCT FEATURES




FOLDABLE BACKREST

Press on the lever to release and fold back rest downwards



STATIONARY HAND BRAKE

Push down to lock and push up to unlock

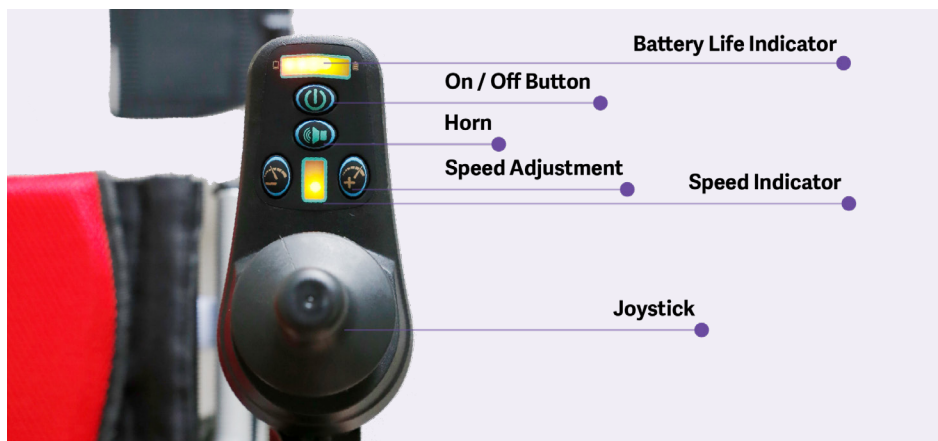

For illustration purposes only

CARE INSTRUCTIONS

- When using the Wheelchair, please pay attention to people and/or items around to avoid collision.
- Lock the wheels before getting in and out of the Wheelchair.
- When getting in and out of the Wheelchair, please do not stand on the footplates.
- The footplates should be folded up / detached beforehand.
- Pay attention to the shift of the Center of Gravity when on elevated grounds.
- When passing through doors or arches, make sure that there is enough room to avoid causing injuries to the user, or the Wheelchair.
- Do not exceed the maximum safe working load.

HBLD2-C ELECTRICAL WHEELCHAIR

PRODUCT SPECIFICATIONS

Overall Length	99 cm or 39"
Overall Width (Wheel to Wheel)	64 cm or 25.2"
Overall Height	93 cm or 36.6"
Folded Length	70 cm or 27.6"
Folded Width	34 cm or 13.4"
Folded Height	74 cm or 29.1"
Seat Depth	40 cm or 15.7"
Seat Width	46 cm or 18.1"
Seat Height	49 cm or 19.3"
Arm Rest Height (Floor to Arm Rest)	69.5 cm or 27.4"
Back Rest Height	40.6 cm or 16"
Front Wheel Diameter	30.5 cm or 12"
Back Wheel Diameter	25.4 cm or 10"
Safe Working Load	100 kg
Overall Weight	23 kg

Check our our full range of electrical wheelchair. When making comparisons, our best suggestion would be for you to think about your environment and consider how certain task like transferring someone is done before deciding.

Scan the QR code to find out more about the product. To scan, use your camera app or a QR code reader on your device.

